

zoboPLUS

FEATURES:

- With Italy fashion design; Strong and long lasting construction
- Diesel or kerosene
- High efficiency combustion
- Stainless steel combustion chamber
- Safety shutdown on flame/fan failure and overheat
- Easy to move
- Easy maintenance
- Digital room and set temperature readout
- Built-in adjustable thermostat

MODEL NO.

PLUS-K50/K80



Model	PLUS-K50	PLUS-K80	PLUS-K105
Power supply	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Heat output	15KW(50,000btu)	20KW(80,000btu)	30KW(100,000btu)
Fuel	Kerosene, Diesel	Kerosene, Diesel	Kerosene, Diesel
Fuel tank	19L	19L	38L
Fuel consumption	1.5L/H	2.0L/H	3.0L/H
Heating area	300m ³	400m ³	600m ³
Product size	795*335*459mm	795*335*459mm	902*410*518mm
Carton size	825*360*490mm	825*360*490mm	922*430*548mm
N.W/G.W	14.5/16.6kgs	14.5/16.6kgs	23.2/26.1kgs
Container Qty(20/40/40HQ)	190/382/460pcs	190/382/460pcs	125/254/310 pcs
Ignition type	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition
Thermostat control	without	with	with

MODEL NO.

PLUS-K135/K180/K220

FEATURES:

- With Italy fashion design; Strong and long lasting construction
- Diesel or kerosene
- High efficiency combustion
- Stainless steel combustion chamber
- Safety shutdown on flame/fan failure and overheat
- Easy to move
- Easy maintenance
- Digital room and set temperature readout
- Built-in adjustable thermostat
- With delay function



Model	PLUS-K135	PLUS-K180	PLUS-K220
Power supply	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Heat output	40KW(135,000btu)	53KW(180,000btu)	65KW(220,000btu)
Fuel	Kerosene, Diesel	Kerosene, Diesel	Kerosene, Diesel
Fuel tank	38L	50L	50L
Fuel consumption	4.0L/H	5.1L/H	6.1L/H
Heating area	800m ³	1060m ³	1300m ³
Product size	902*410*518mm	1057*465*518mm	1057*465*518mm
Carton size	922*430*548mm	1075*475*535mm	1075*475*535mm
N.W/G.W	23.3/26.2kgs	26.7/30.2kgs	26.9/30.4kgs
Container Qty(20/40/40HQ)	125/254/310 pcs	100/200/245pcs	100/200/245pcs
Ignition type	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition
Thermostat control	with	with	with

ZOBO CLASSICAL KEROSENE/DIESEL FORCED AIR HEATERS

YOUR GOOD CHOOSE

- Strict quality inspection before shipment
- Safe protection for customer's order
- Good service on customer's order
- Strong and professional technical team



zobo KEROSENE/DIESEL FORCED AIR HEATERS



MODEL NO.

ZB-K45/K70

• FEATURES:

- Robust, compact design ;Strong and long lasting construction
- High efficiency combustion
- Stainless steel combustion chamber
- Safety shutdown on flame/fan failure and overheat
- Easy to move
- Easy maintenance



MODEL NO.

ZB-K125/K175/K215



Model	ZB-K45	ZB-K70	ZB-K100	ZB-K125	ZB-K175	ZB-K215
Power supply	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Heat output	13KW(45,000btu)	20KW(70,000btu)	30KW(100,000btu)	37KW(125,000btu)	51KW(175,000btu)	63KW(215,000btu)
Fuel	Kerosene,Diesel	Kerosene,Diesel	Kerosene,Diesel	Kerosene,Diesel	Kerosene,Diesel	Kerosene,Diesel
Fuel tank	19L	19L	38L	38L	50L	50L
Fuel consumption	1.3L/h	2.0L/h	2.8L/h	3.6L/h	5.0L/h	6.0L/h
Heating area	260m ³	400m ³	600m ³	740m ³	1020m ³	1260m ³
Product size	770*290*395mm	770*290*395mm	900*542*600mm	1050*542*620mm	1200*600*620mm	1200*600*620mm
Carton size	805*335*440mm	805*335*440mm	830*445*460mm	915*445*490mm	1080*445*495mm	1080*445*495mm
N.W/G.W	12.7/14.0kgs	12.9/14.2kgs	23.0/26.0kgs	23.1/26.1kgs	26.2/29.4kgs	29.8/30.0kgs
Container Qty(20/40/40HQ)	245/502/600pcs	245/502/600pcs	128/260/325pcs	128/260/325pcs	108/220/275pcs	108/220/275pcs
Ignition type	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition
Thermostat control	without	with	with	with	with	with

INDIRECT KEROSENE/DIESEL FORCED AIR HEATERS

zobo | INDIRECT KEROSENE/DIESEL FORCED AIR HEATERS



MODEL NO.

ZB-H70/H100/H170

• FEATURES:

- Thermally protected motor
- Electronic flame control with photocell
- Thermostat control included
- Continuous spark ignition
- High air displacement
- Easy maintenance
- Housing remains cool to the touch



OPTIONAL ACCESSORIES:



Stainless steel chimney



High temperature
resistant duct



Front connector

Model	ZB-H70	ZB-H100	ZB-H170
Power supply	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Heat output	20KW(70,000btu)	30KW(100,000btu)	50KW(170,000btu)
Fuel	Kerosene,Diesel	Kerosene,Diesel	Kerosene,Diesel
Fuel tank	38L	50L	50L
Fuel consumption	1.8L/H	3.0L/H	5.0L/H
Heating area	400m ³	600m ³	1000m ³
Product size	1050*542*620MM	1200*600*620MM	1240*770*500MM
Carton size	915*445*490MM	1080*455*485MM	1230*480*570MM
N.W/G.W	25.1/28.1kgs	35.0/40.0kgs	37.5/42.0kgs
Container Qty(20/40/40HQ)	128/260/325pcs	108/220/275pcs	80/168/195pcs
Ignition type	Continuous Spark Ignition	Continuous Spark Ignition	Continuous Spark Ignition
Thermostat control	with	with	with

PROPANE/BUTANE/ LPG GAS FORCED AIR HEATERS

MODEL NO.

ZB-G40A/G60A/G100A/G150A



FEATURES:

- Robust, compact design ;Strong and long lasting construction
- High efficiency combustion
- Stainless steel combustion chamber
- Safety shutdown on flame/fan failure and overheat
- Easy to move
- Easy maintenance
- 100% Heat Efficiency



Model	ZB-G40A	ZB-G60A	ZB-G100A	ZB-G150A
Power supply	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Rated heat output	40,000btu	40,000-60,000btu	70,000-100,000btu	120,000-150,000btu
Heating area	234m³	234m³-352m³	410m³-586m³	704m³-880m³
Gas consumption	0.83Kg/h	0.83-1.25kg/h	1.46-2.08kg/h	2.5-3.13kg/h
Air flow	500m³/h	500m³/h	670m³/h	670m³/h
Gas category	LPG/Propane	LPG/Propane	LPG/Propane	LPG/Propane
Pressure output	28mbar/11"W.C	28mbar/11"W.C	28mbar/11"W.C	28mbar/11"W.C
Ignition type	Piezo ignition	Continuous spark ignition	Continuous spark ignition	Continuous spark ignition
Carton size	530*255*375mm	530*255*375mm	703*284*480mm	703*284*480mm
Gross weight	6.5kgs	6.6kgs	9.2kgs	9.2kgs
Container Qty(20/40/40HQ)	600/1212/1412pcs	600/1212/1412pcs	300/608/740pcs	300/608/740pcs



ZB-G10/G15/G35/G50

MODEL NO.

• FEATURES:

- Robust, light weight, compact design
- Efficient combustion, odourless, no fumes
- Safety shutdown on gas/flame/fan failure and overheat
- Strong and long lasting construction
- Easy maintenance
- 100% Heat efficiency
- Overheat protection

Model	ZB-G10	ZB-G15	ZB-G35	ZB-G50
Power supply	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Rated heat output	10KW	15KW	30KW	50KW
Gas consumption	0.71Kg/h	1.07Kg/h	2.13Kg/h	3.63Kg/h
Air flow	300m³	300m³/h	750m³/h	800m³/h
Gas category	LPG/Propane	LPG/Propane	LPG/Propane	LPG/Propane
Regulator pressure output	300mbar	300mbar	700mbar	1500mbar
Product size	332*220*310mm	375*220*310mm	475*225*350mm	580*225*355mm
Carton size	380*265*380mm	430*265*380mm	475*225*355mm	605*250*360mm
N.W/G.W	4.4/5.0kgs	4.7/5.4kgs	5.2/5.6kgs	6.2/7.6kgs
Container Qty(20/40/40HQ)	816/1638/1911pcs	720/1470/1715pcs	640/1330/1560pcs	510/1050/1238pcs



Model	ZB-G15T	ZB-G35T	ZB-G50T
Power supply	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Rated heat output	7-15KW	22-30KW	45-50KW
Gas consumption	0.5-1.07Kg/h	1.7-2.31Kg/h	3.2-3.63Kg/h
Air flow	140-300m³/h	440-600m³/h	900-1000m³/h
Gas category	LPG/Propane	LPG/Propane	LPG/Propane
Regulator pressure output	300mbar	700mbar	1500mbar
Product size	375*220*310mm	475*225*350mm	580*225*355mm
Carton size	430*265*380mm	490*250*355mm	605*250*360mm
N.W/G.W	4.7/5.4kgs	6.5/7.1kgs	7.2/8.0kgs
Container Qty(20/40/40HQ)	720/1470/1715pcs	640/1330/1560pcs	510/1050/1238pcs

zobo | GAS FORCED AIR HEATERS

• FEATURES:

- Robust, light weight, compact design
- Efficient combustion, odourless, no fumes
- Safety shutdown on gas/flame/fan failure and overheat
- Strong and long lasting construction
- Easy maintenance
- 100% Heat efficiency
- Overheat protection

MODEL NO.
ZB-G20/G30



Model	ZB-G20	ZB-G30
Power supply	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Rated heat output	20KW	30KW
Gas consumption	1.42Kg/h	2.13Kg/h
Air flow	500m³/h	750m³/h
Gas category	LPG/Propane	LPG/Propane
Regulator pressure output	700mbar	700mbar
Product size	520*270*480mm	520*270*480mm
Carton size	590*345*370mm	590*345*370mm
N.W/G.W	8.0/9.0kgs	8.2/9.2kgs
Container Qty(20/40/40HQ)	384/768/896pcs	384/768/896pcs

zobo | ELECTRIC FAN HEATERS

• FEATURES:

- Adjustable thermostat control
- Overheat protection
- Waterproof class IPX4
- Insulated handle more safe for using

MODEL NO.

ZB-EY2/EY3/EY5/EY9/EY15



Model	ZB-EY2	ZB-EY3	ZB-EY5	ZB-EY9	ZB-EY15
Power supply	220V/50HZ	220V/50HZ	380V/50HZ	380V/50HZ	380-400V/50HZ
Heating output	25/1000/2000W	30/1500/3000W	30/2500/5000W	52/4500/9000W	95/5000/10000/15000W
Air flow	120m³/h	280m³/h	320m³/h	410m³/h	1292m³/h
Heating area	40m³	60m³	100m³	180m³	300m³
Carton size	360*320*425mm	380*350*437mm	380*350*437mm	430*410*520mm	560*456*526mm
N.W/G.W	5.0/5.8kgs	6.2/7.1kgs	7.3/8.1kgs	11.4/12.2kgs	19.5/21.6kgs
Container Qty(20/40/40HQ)	598/1236/1408pcs	600/1245/1460pcs	600/1245/1460pcs	389/806/944pcs	218/454/518pcs

MODEL NO.
ZB-EF2/EF3/EF5/EF9/EF15




• **FEATURES:**

- Adjustable thermostat control
- Overheat protection device
- With cooling fan
- Waterproof class IPX4
- Free standing



Model	ZB-EF2	ZB-EF3	ZB-EF5	ZB-EF9	ZB-EF15
Power supply	220V/50HZ	220V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
Heating output	25/1000/2000W	30/1500/3000W	30/2500/5000W	52/4500/9000W	95/5000/10000/15000W
Air flow	120m³/h	280m³/h	320m³/h	708m³/h	1292m³/h
Heating area	40m³	60m³	100m³	180m³	300m³
Carton size	265*255*355mm	300*297*445mm	350*310*450mm	365*315*520mm	420*365*570mm
N.W/G.W	3.5/4.0kgs	5.0/5.7kgs	5.8/6.5kgs	9.4/10.4kgs	14.3/15.4kgs
Container Qty(20/40/40HQ)	1212/2424/2828pcs	665/1365/1638pcs	625/1235/1417pcs	468/970/1137pcs	322/667/782pcs

MODEL NO.
ZB-IE/IE10/IE18/IE24/IE32

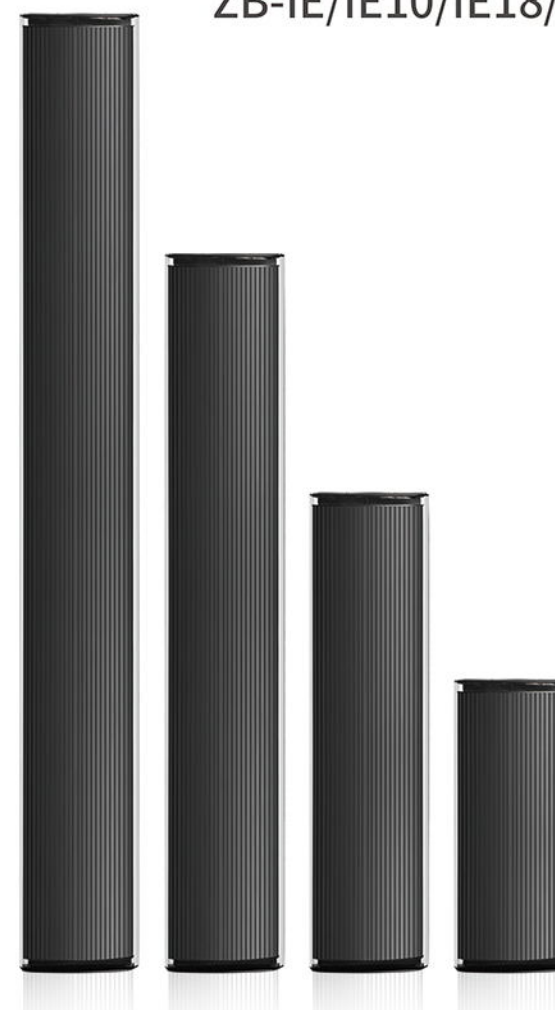

• **FEATURES:**

- Safe: overheat cut off device
- Quick heating: 5 minutes
- Highest heating efficiency: 99.9%
- Energy saving: 80% electricity less
- Easy to install
- Comfortable, good for health
- No smell, No light, No noise, No transformation



OPTIONAL ACCESSORIES:



thermostat system



remote control

Model	ZB-IE10	ZB-IE18	ZB-IE24	ZB-IE32
Power	1000W	1800W	2400W	3200W
Cover area(m²)	10	20	30	40
Voltage/frequency	240V/50HZ	240V/50HZ	240V/50HZ	240V/50HZ
Rated current	4.3A	7.8A	10.4A	13.9A
Surface temperature	330°C	330°C	330°C	330°C
Packing size(mm)	705*265*155mm	1105*265*155mm	1605*265*155mm	2105*265*155mm
N.W/G.W	4.3/5.0	6.5/7.2	9.7/11.6	13.2/14.8
Container Qty(20/40/40HQ)	1050/2130/2414pcs	660/1320/1496pcs	444/926/1056pcs	346/700/798pcs

zobo TANK-TOP HEATERS



ZB-TT10

MODEL NO.



MODEL NO.

ZB-TT15



ZB-TT30

MODEL NO.



MODEL NO.

ZB-TT360

• FEATURES:

- Quiet operation
- Quick Connect P.O.L Tank Connection
- For indoor or outdoor use
- Safety Shut-Off Valve
- With Anti-tip device
- CSA Approved



Model	ZB-TT10	ZB-TT15	ZB-TT30	ZB-TT360
Fuel type	Propane	Propane	Propane	Propane
Tank capacity	10Lb	20Lb	20Lb	20Lb
Temperature control	Variable	Variable	Variable	Variable
Variable heat output	(8k-9k-10k Btu ' s)	(9k-13k-15k Btu ' s)	(18k-26k-30k Btu ' s)	(30k-40k-50k Btu ' s)
Heating area	250sq.ft	378sq.ft	750sq.ft	1010sq.ft
Packing size	220*190*300mm	220*190*300mm	450*170*305mm	440*328*252mm
N.W/G.W	1.0/1.35kgs	1.1/1.47kgs	2.18/2.63kgs	1.95/2.6kgs
Container Qty(20/40/40HQ)	2296/4606/5264pcs	2296/4606/5264pcs	1246/2499/2831pcs	833/1437/2156pcs

zobo GAS CONVECTION HEATERS

• FEATURES:

- Continuous Variable BTU Output
- Auto Safety Shutoff
- Inner Windshield
- Aluminized Steel Construction
- Easy maintenance

MODEL NO.

ZB-C80/C200



Model	ZB-C80	ZB-C200
Fuel type	Propane	Propane
Output Power	50,000-80,000btu	50,000-200,000btu
Gas consumption	1.05kg/h-1.67kg/h	1.05kg/h-4.19kg/h
Pressure output	11.0"W.C	10PSI
Heating area	120-190m ²	120-460m ²
Packing size	430*430*330mm	430*430*410mm
N.W/G.W	3.9/5.2kg	4.8/6.5kg

MODEL NO.

ZB-P40



• FEATURES:

- With chimney design, heating is more clean
- High precision and durability construction, made with the latest technology machinery of metal processing
- Fully automatic function
- Fire inspection during function at anytime
- Automatic Pellet feeding reduction in case of exhaust over-heating
- High Quality function
- Safety device and temperature control system

MODEL NO.

ZB-P80



Model	ZB-P40	ZB-P80
Power supply	110V/60HZ 220V/50Hz	110V/60HZ 220V/50Hz
Rated Heat output	40KW	80KW
Fuel	pellet(Φ 6-8mm)	pellet (Φ 6-10mm)
Adjustable power	2.2-45KW	4.3-90KW
Fuel consumption	0.4-8.6kgs/h	0.8-17.2kgs/h
Thermal efficiency	90%	90%
Ashes qty	0.50%	0.50%
Pellet storage capacity	40KGS	175KGS
Product size	1191*505*964mm	1702*830*1429mm
Electric control system	Automatic	Automatic



ZB-B50



ZB-B80



ZB-B130



ZB-B240



ZB-B500

• FEATURES:

- Intelligent control system
- Affordable
- Energy saving and environmental protection
- Safe and beautiful
- Health and comfort



Model	ZB-B50	ZB-B80	ZB-B130	ZB-B240	ZB-B500
Power supply	110V/60HZ 220V/50Hz	110V/60HZ 220V/50Hz	110V/60HZ 220V/50Hz	110V/60HZ 220V/50Hz	110V/60HZ 220V/50Hz
Rated Heat output	50KW	80KW	130KW	240KW	500KW
Fuel	pellet(Φ 6-10mm)	pellet(Φ 6-10mm)	pellet(Φ 6-10mm)	pellet(Φ 6-10mm)	pellet(Φ 6-10mm)
Adjustable power	3-65KW	4.3-90KW	7.6-160KW	14.3-300KW	26.2-550KW
Fuel consumption	0.6-12.4kgs/h	0.8-17.2kgs/h	1.5-30.6kgs/h	2.7-57.3kgs/h	5-105.1kgs/h
Thermal efficiency	98%	98%	98%	98%	98%
Ashes qty	0.50%	0.50%	0.50%	0.50%	0.50%
Pellet storage capacity	100kgs	200kgs	200kgs	200kgs	400kgs
Burner size	537*244*213mm	768*297*277mm	795*312*283mm	890*371*374mm	1152*539*543mm
Container Qty(20/40/40HQ)	63/147/159 SETS	46/99/105 SETS	46/99/105 SETS	50/108/120 SETS	32/72/78 SETS
Electric control system	Automatic	Automatic	Automatic	Automatic	Automatic